

DIP SWITCH CCT CHANGE

2700K-6500K

GuangDong YND Technological Lighting Co.,Ltd

No.8, Yihui 3rd Road, Maohui Industrial Zone,
Henglan Town, Zhongshan, GuangDong, China.
www.yndled.com
info@yndled.com

WhatsApp

WeChat

2024



PRODUCT
CATALOG

Led Track Lighting System

2024

COMPANY PROFILE

About US

Yndlux established in 2009, is a leading LED lighting manufacturer based in Henglan, Zhongshan, GD. With a large facility more than 10000m^{2}and a dedicated team of over 200 employees, we specialize in a wide range of LED lighting products, including Magnetic Lighting Systems, AC Track Light Systems, Linear Trunking Systems, Downlights, Office Lighting, Linear Aluminum Profiles, and smart lighting control systems.

Our products are certified with TUV, CE, GS, CB, 3C, ROHS, SAA, UKCA, and UL, ensuring their safety and quality. Our main focus is to provide comprehensive lighting solutions for all businesses.

15+
Years

200+
Staff

10000+
Area

ENTERPRISE STRENGTH

Raw Material Workshop



Assembly Production Line



Painting Workshop



AgingTestRoom 1




AgingTestRoom 2



High-Speed SMT Workshop



IES DarkRoom Testing Center



Integrating Sphere Optical Test Center



HONNORS AND CERTIFICATES




















WIRED CONTROL

Global Lighting Control Protocol

Dimmable / CCT Adjustable
Intelligent control series

One of the DALI2 Community Members
Community Members (43)

DALI 2

0/1-10V

A.A.G. Stucchi S.r.l. u.s.
Ade Elettronica S.R.L.
Adolf Schuch GmbH
Apollo Lighting
BKT Automation Ltd
BÄRO GmbH & Co. KG
Bergdahls AB
Bluetooth Networked Systems and Connected Lighting Solutions
CMC Engineering GmbH
Diamantle Lighting S.r.l.
Dongguan Louis Geer Optoelectronics Technology Co., Ltd.
E-LITE Lighting Co., Ltd.
Eetamax Energy Solutions PVT LTD
ELR Co., Limited
enLighten Australia Pty Ltd
Escofet 1886 S.A.
Guangdong YND Technological Lighting Co., Ltd
VALO Oy
imperial Kft. & Zrt.
Kanlux S.A.

CATALOG

Linear Track Lights 07–18

Linear Track Lights Introduction 07–10

43mm Linear Track Lights Fixed 11–12

43mm Linear Track Lights Single Swing 13–14

43mm Linear Track Lights Double Swing 15–16

43mm Linear Track Lights Double Swing + PC 17–18

Spot Track Lights 19–42

Three Phase Track Lights 19–24

Two Phase Track Lights 25–42

Tracks and Accessories 43–74

Track System Introduction 43–44


Six Wires Track System – Suitable for DALI / DMX control 45–46




Five Wires Three Phase Track System 47–48




Four Wires Three Phase Track System 49–56

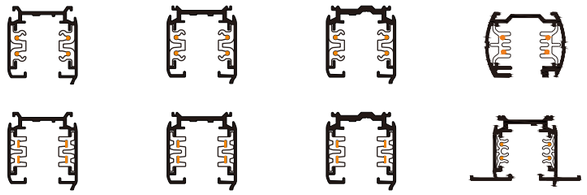


Three Wires Two Phase Track System 57–62




Two Wires Single Phase Track System 63–70

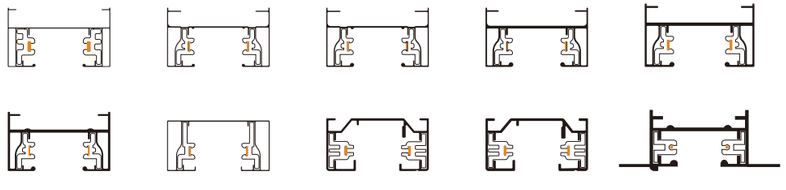

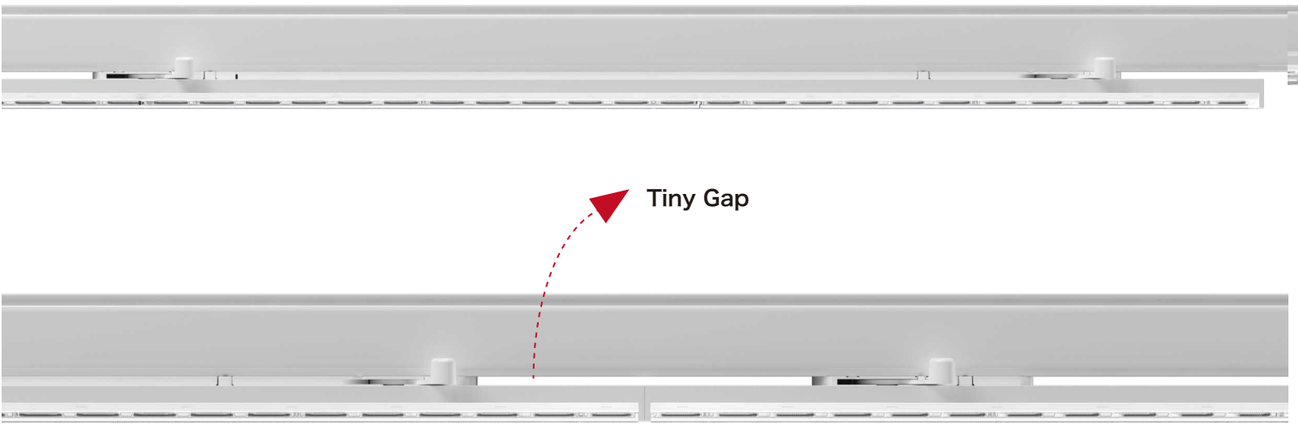

Seamless Connection Installation

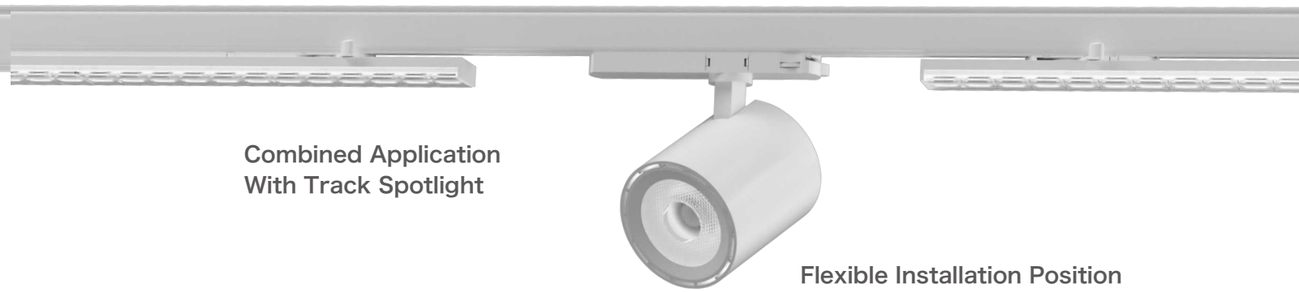

Combined Application
With Track Spotlight

Flexible Installation Position

Installation Instructions

How to avoid the track rail joints during installation
There are 4 movable positions for the LED driver in the T-line luminaire.
There are 2 movable position of the fixing lock in the T-line luminaire.



Lenses



WD-90°




LS/RS



DS

Optics

SP-30
Extremely Narrow



NR-60
Narrow




WD-90
Wide



WD-120
Wide




LS/RS
Asymmetrical




DS
Double Asymmetric



Adaptation





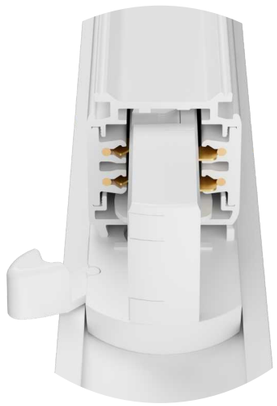

Branded drive optional

Boke



Nordicaluminium



Philips



Osram



Eaglerise



43MM LED LINEAR Lighting System



43mm Fixed



43mm Single Swing

43mm Double Swing



43mm Double Swing + PC

43mm Fixed 90°

0/1-10V DALI



- 30°/60°/90°/120°/ LS/RS Asymmetrical / Double Asymmetric
- Lengths in 600mm/1500mm
- Compatible with 3/4/6 wires track rail
- UP TO 180LM/W
- DIP Switch Driver
- DALI/0-10V/Triac/DIM switch dimmable Optional
- 80RA/90RA/97RA


180lm/w

5 YEAR Warranty 7 YEAR Warranty

ELECTRICAL DATA


Material	6063 Aluminum	Housing Color	White/Black/Customized
Input Power	14W/16W/18W/20W/35W/40W/45W/50W	Input Voltage	AC220-240V 50/60Hz
Lumens Efficiency	180lm/W	IP Rate	IP20
CCT	2700K/3000K/3500K/4000K/5000K/ 5700K/6500K	Dimming	0/1-10V / DALI2
Chips	Osram/Brigelux	CRI	80Ra/90Ra/97Ra
Driver	Boke/Tridonic/Philips	IES FILE	Available On Request

Opptical Lens

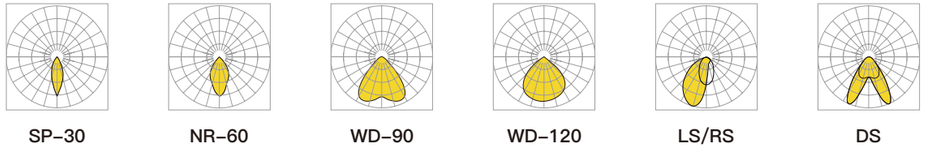

SP-30	NR-60	WD-90	WD-120	LS/RS	DS
Extremely Narrow	Narrow	Wide	Wide	Asymmetrical	Double Asymmetric

Installation Effect Drawing

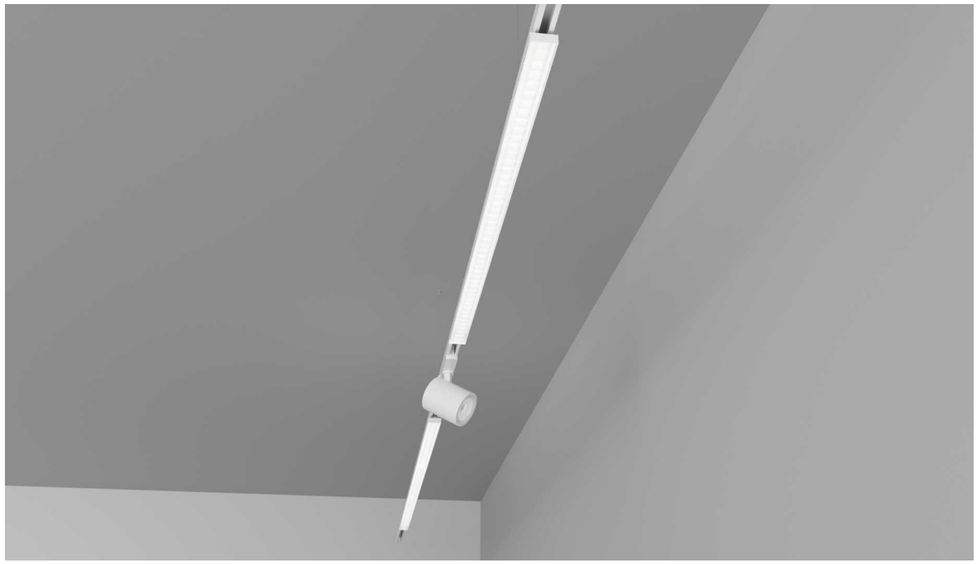

43mm Single Swing 90°

0/1-10V DALI



- 30°/60°/90°/120°/ LS/RS Asymmetrical / Double Asymmetric
- Lengths in 600mm/1500mm
- Compatible with 3/4/6 wires track rail
- UP TO 180LM/W
- Tiltable Lighting Panel
- DIP Switch Driver
- DALI/0-10V/Triac/DIM switch dimmable Optional
- 80RA/90RA/97RA


180lm/w

5 YEAR Warranty 7 YEAR Warranty

ELECTRICAL DATA


Material	6063 Aluminum	Housing Color	White/Black/Customized
Input Power	14W/16W/18W/20W/35W/40W/45W/50W	Input Voltage	AC220-240V 50/60Hz
Lumens Efficiency	180lm/W	IP Rate	IP20
CCT	2700K/3000K/3500K/4000K/5000K/ 5700K/6500K	Dimming	0/1-10V / DALI2
Chips	Osram/Brigelux	CRI	80Ra/90Ra/97Ra
Driver	Boke/Tridonic/Philips	IES FILE	Available On Request

Opptical Lens



SP-30	NR-60	WD-90	WD-120	LS/RS	DS
Extremely Narrow	Narrow	Wide	Wide	Asymmetrical	Double Asymmetric

Installation Effect Drawing

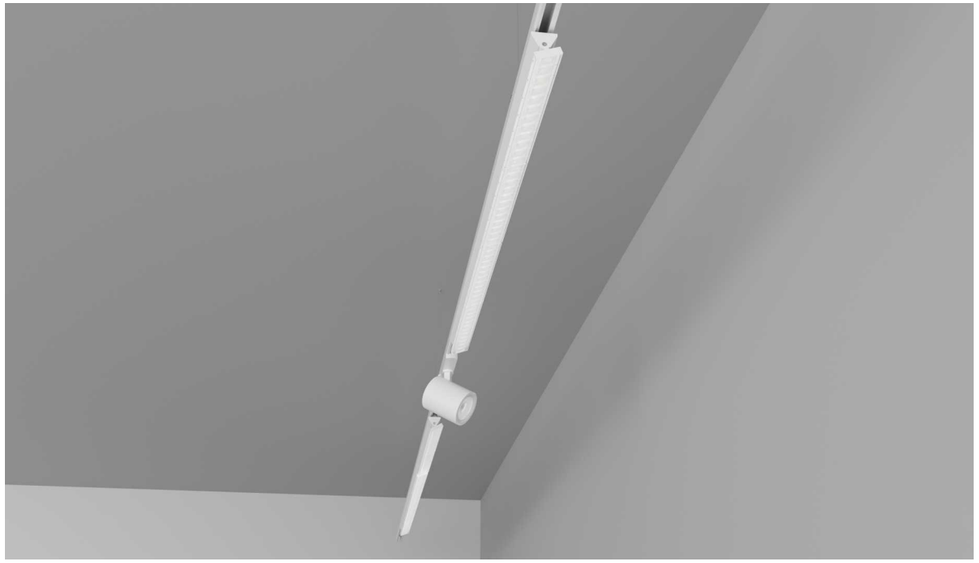

43mm Double Swing 90°

0/1-10V DALI



- 30°/60°/90°/120°/ LS/RS Asymmetrical / Double Asymmetric
- Lengths in 600mm/1500mm
- Compatible with 3/4/6 wires track rail
- UP TO 180LM/W
- Tiltable Lighting Panel
- DIP Switch Driver
- DALI/0-10V/Triac/DIM switch dimmable Optional
- 80RA/90RA/97RA


180lm/w

5 YEAR Warranty 7 YEAR Warranty

ELECTRICAL DATA


Material	6063 Aluminum	Housing Color	White/Black/Customized
Input Power	14W/16W/18W/20W/35W/40W/45W/50W	Input Voltage	AC220-240V 50/60Hz
Lumens Efficiency	180lm/W	IP Rate	IP20
CCT	2700K/3000K/3500K/4000K/5000K/ 5700K/6500K	Dimming	0/1-10V / DALI2
Chips	Osram/Brigelux	CRI	80Ra/90Ra/97Ra
Driver	Boke/Tridonic/Philips	IES FILE	Available On Request

Opptical Lens



SP-30	NR-60	WD-90	WD-120	LS/RS	DS
Extremely Narrow	Narrow	Wide	Wide	Asymmetrical	Double Asymmetric

Installation Effect Drawing

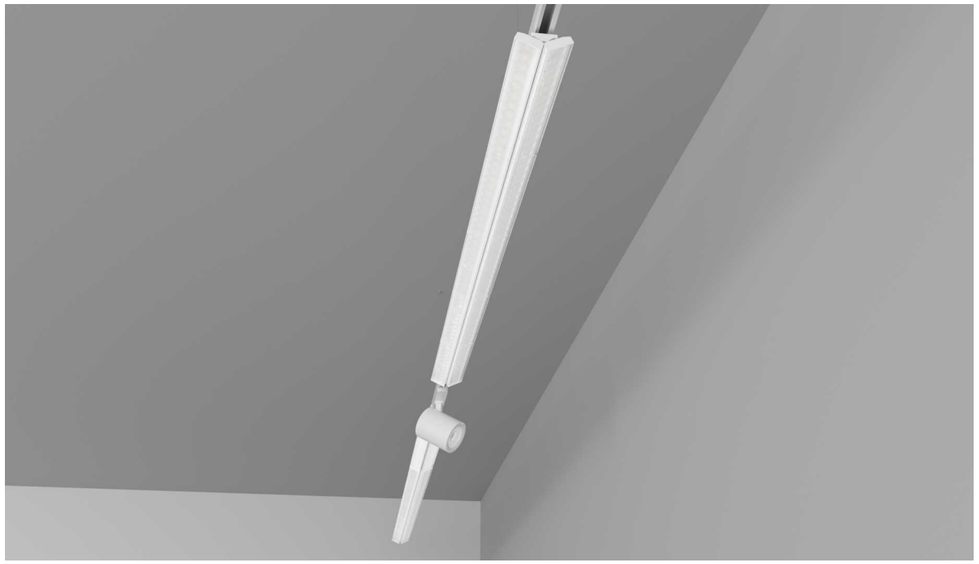

43mm Double Swing 90°+ PC

0/1-10V DALI



- 30°/60°/90°/120°/ LS/RS Asymmetrical / Double Asymmetric
- Lengths in 600mm/1500mm
- Compatible with 3/4/6 wires track rail
- UP TO 180LM/W
- Tiltable Lighting Panel
- DIP Switch Driver
- DALI/0-10V/Triac/DIM switch dimmable Optional
- 80RA/90RA/97RA


180lm/w

5 YEAR Warranty 7 YEAR Warranty

ELECTRICAL DATA


Material	6063 Aluminum	Housing Color	White/Black/Customized
Input Power	14W/16W/18W/20W/35W/40W/45W/50W	Input Voltage	AC220-240V 50/60Hz
Lumens Efficiency	180lm/W	IP Rate	IP20
CCT	2700K/3000K/3500K/4000K/5000K/ 5700K/6500K	Dimming	0/1-10V / DALI2
Chips	Osram/Brigelux	CRI	80Ra/90Ra/97Ra
Driver	Boke/Tridonic/Philips	IES FILE	Available On Request

Opptical Lens



SP-30	NR-60	WD-90	WD-120	LS/RS	DS
Extremely Narrow	Narrow	Wide	Wide	Asymmetrical	Double Asymmetric

Installation Effect Drawing

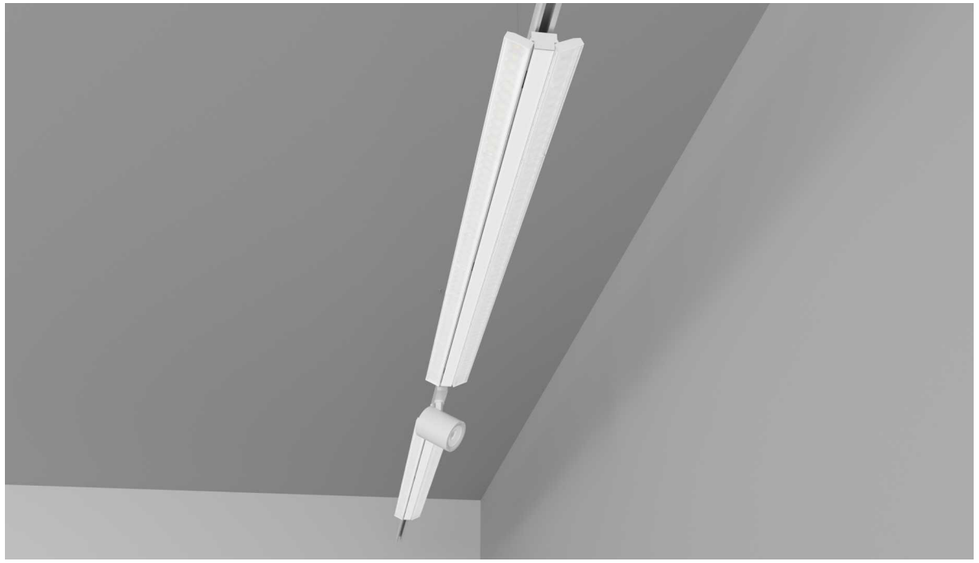



High-Efficiency Track Spot


Ra≥90　150LM/W(IES LUMEN)



Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 18°/30°/40°/50°/60°
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-XS

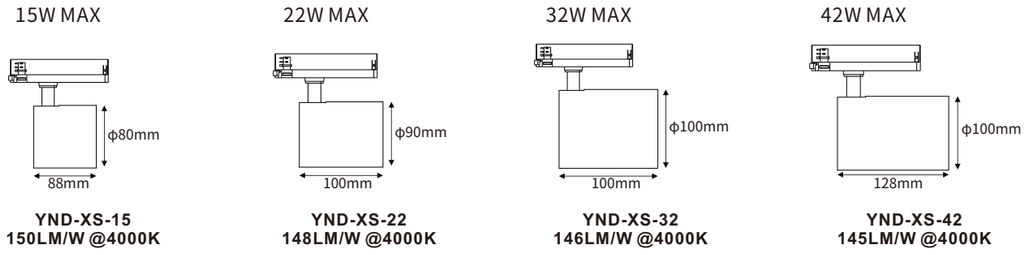







Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-JY

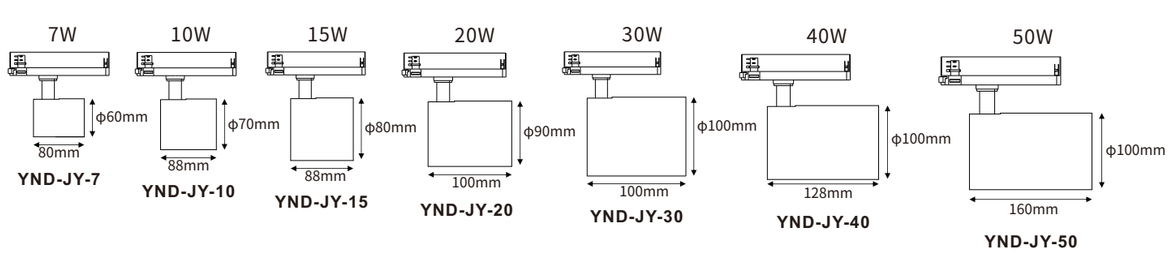






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-XY

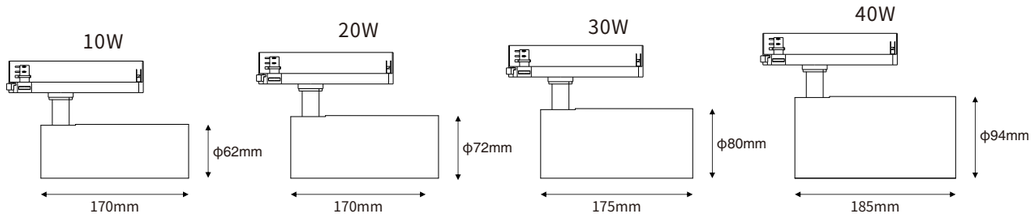






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-CTE

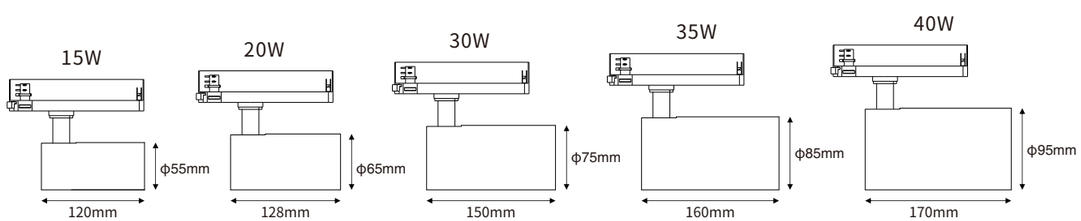




150lm/w



Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-CTF

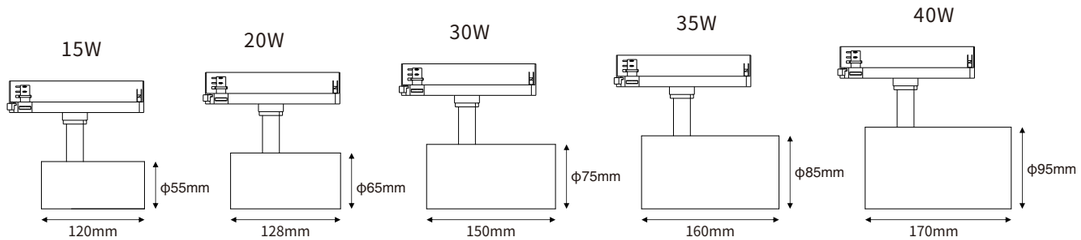

YND-CTF-15 YND-CTF-20 YND-CTF-30 YND-CTF-35 YND-CTF-40






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-TJZ

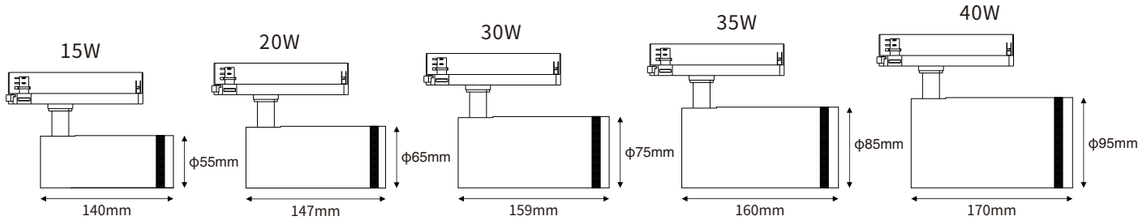


YND-TJZ-15 YND-TJZ-20 YND-TJZ-30 YND-TJZ-35 YND-TJZ-40



Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-TS

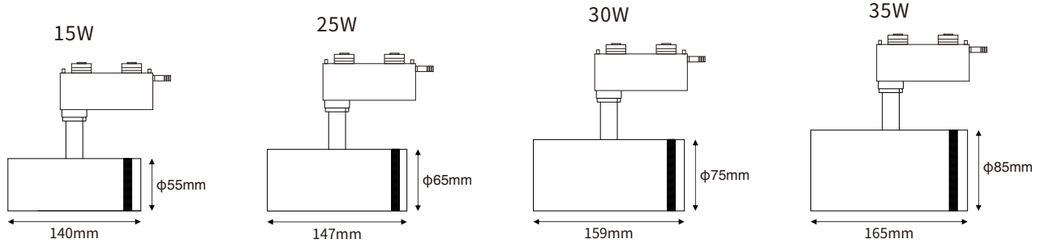

YND-TS-15 YND-TS-25 YND-TS-30 YND-TS-35






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-SRTJ

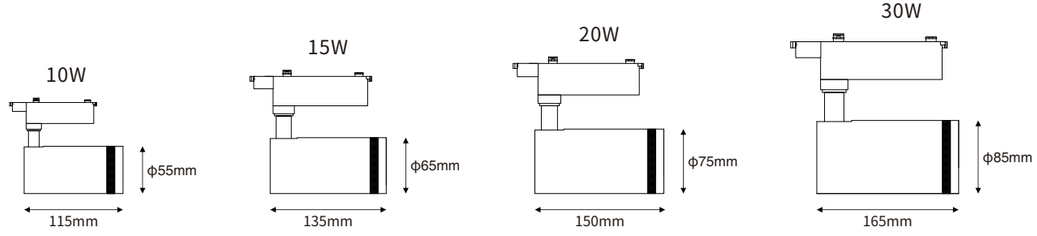

YND-SRTJ-10 YND-SRTJ-15 YND-SRTJ-20 YND-SRTJ-30




White Black Reflective Cup

Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/ Wires Driver Box
IES FILE: Available On Request

YND-ZS

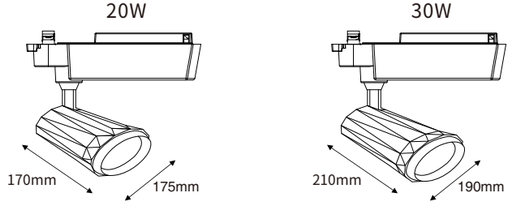

YND-ZS-20 YND-ZS-30

3 YEAR Warranty





160lm/w




Gray White Black Silver Lens Reflective Cup High-gloss Cup

Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4/6 Wires Driver Box
IES FILE: Available On Request

YND-JYS

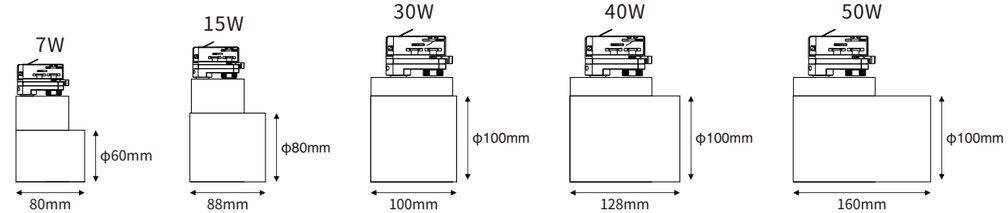

YND-JYS-7 YND-JYS-15 YND-JYS-30 YND-JYS-40 YND-JYS-50


5 YEAR Warranty 7 YEAR Warranty



Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-HL

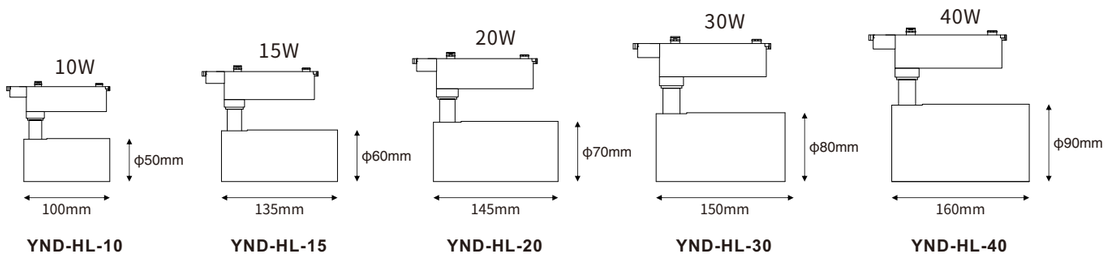




Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-MY

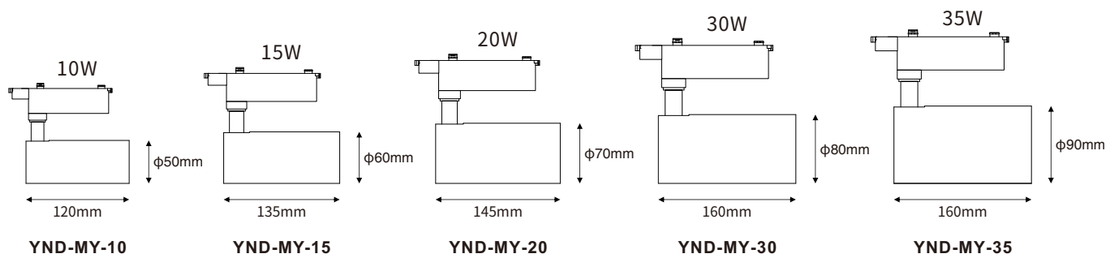




Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-MZ

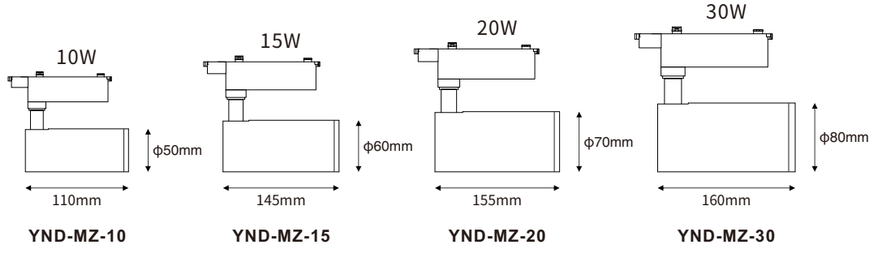


YND-MZ-10 YND-MZ-15 YND-MZ-20 YND-MZ-30



Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-FF

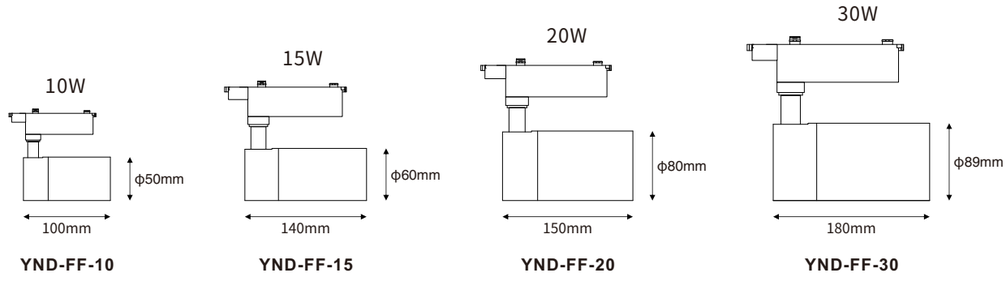

YND-FF-10 YND-FF-15 YND-FF-20 YND-FF-30






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-FXD

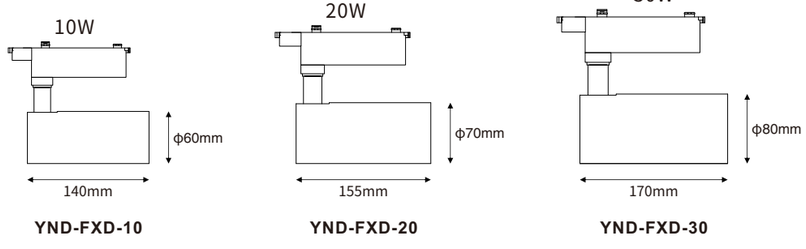

YND-FXD-10　　YND-FXD-20　　YND-FXD-30












Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-CY

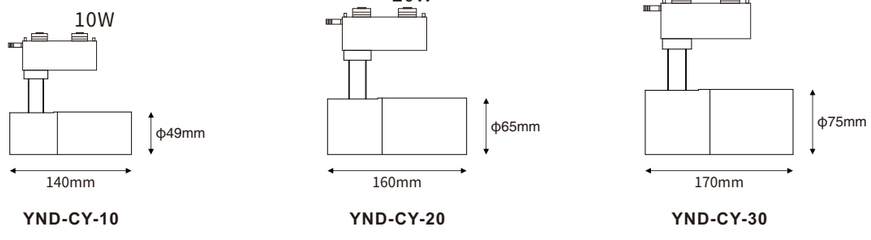

YND-CY-10　　YND-CY-20　　YND-CY-30







Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-HD



YND-HD-20



YND-HD-30









Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request


YND-ZL




YND-ZL-10



YND-ZL-15



YND-ZL-30



YND-ZL-40






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-LS

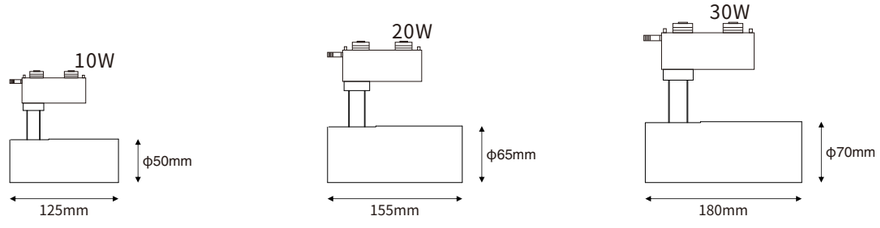

YND-LS-10　YND-LS-20　YND-LS-30






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-BFM

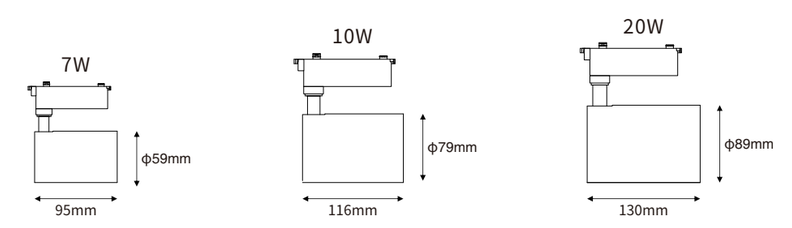

YND-BFM-7　YND-BFM-10　YND-BFM-20




White Black Lens

Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-PL

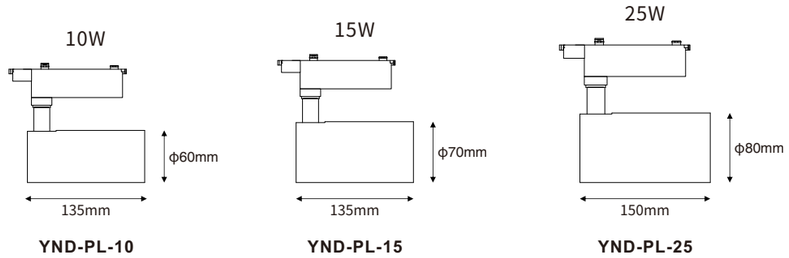

YND-PL-10 YND-PL-15 YND-PL-25




White Black Lens

Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-LJ

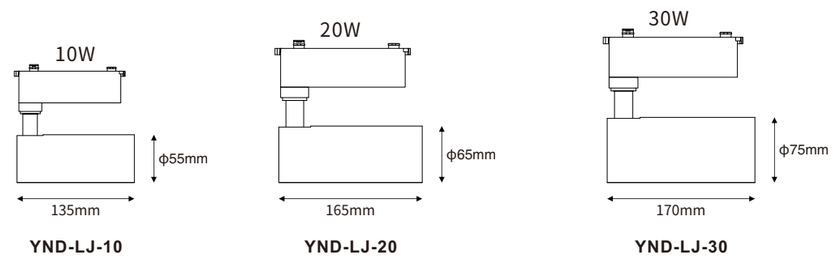

YND-LJ-10 YND-LJ-20 YND-LJ-30






Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3/4 Wires Driver Box
IES FILE: Available On Request

YND-TCD



YND-TCD-30








Voltage: AC220V
Material: Aluminum
Housing Color: Black/White/Customized
IP Rate: IP20
Dimming: ON OFF / Dip Swtich CCT / DALI / Triac

CCT: 2700K/3000K/3500K/4000K/5700K/6500K
RA: ⩾90/Full spectrum
Beam Angle: 15°/24°/36°/60°
Light source: Osram/Cree/Brigelux/Lumileds
Driver Box: 2/3 Wires Driver Box
IES FILE: Available On Request

YND-LH

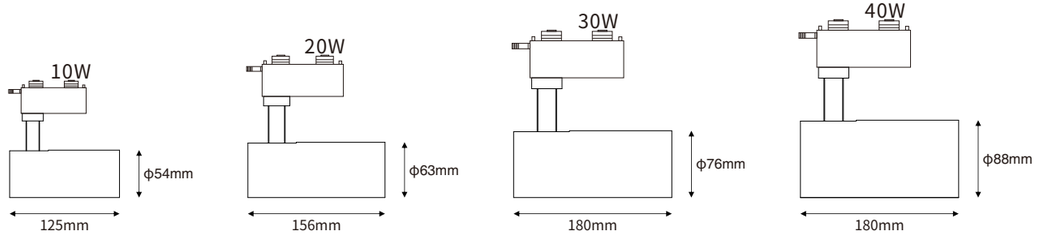

YND-LH-10　YND-LH-20　YND-LH-30　YND-LH-40



Product Ranges

YND track systems

YND track systems use aluminum and copper materials,easy to install Suitable for commercial lighting furniture lighting and engineering lighting.

Track processing(arc track)

YND track factory has first-class machinery, processing 2-line, 3-line and 4-line track into arc shapes to be connected into round shapes of 2meters to 10meters。

Track connectors

YND track systems have different connectors,capable of connecting into L-shape,T-shape,X-shape and I-shape,for ease of use,elegance and safety.

Power connectors

YND power are available in 2lines,3lines and 4lines,made of all-new PC/PVC,with diversified styles.

YND Magnet Track Systems

YND track systems use aluminum and copper materials,easy to install Suitable for commercial lighting furniture lighting and engineering lighting.

6– Wires Track System – Suitable for DALI / DMX control

YND-601A




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F | IP20 | 10

YND-602A




COLOUR:

WH BK SL

LENGTH:


1000mm/1500mm/2000mm/3000mm




F | IP20 | 10

Track Connectors


NO: YND-6-Feeder

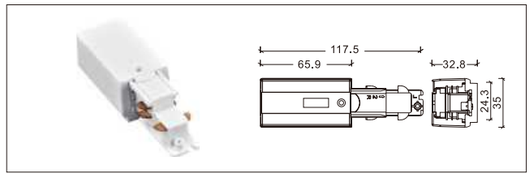


NO: YND-6-I

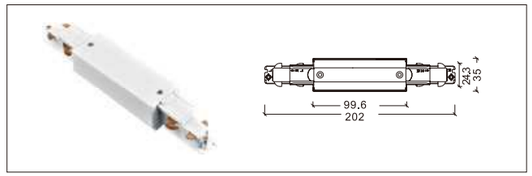


NO: YND-6-L 6

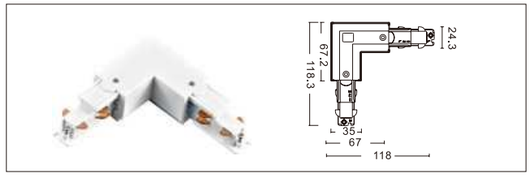


NO: YND-6-T

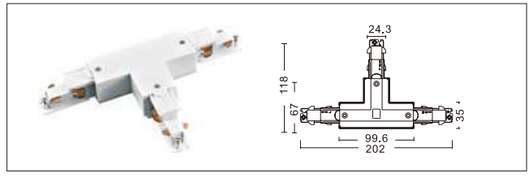


NO: YND-6-X

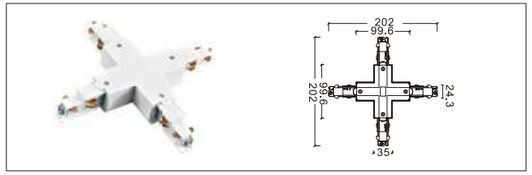


NO: YND-6-I-MINI

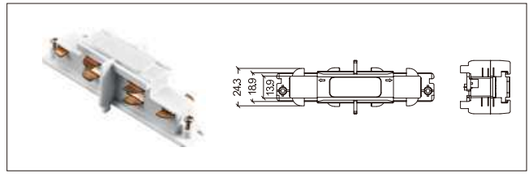


NO: N609

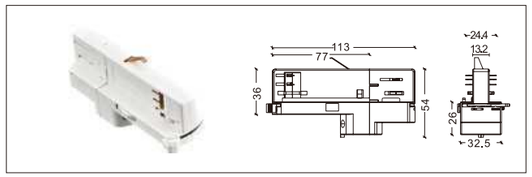


NO: YND-610 6

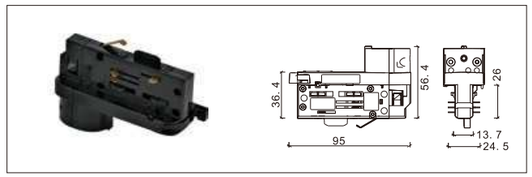

NO: YND-6-END CAP

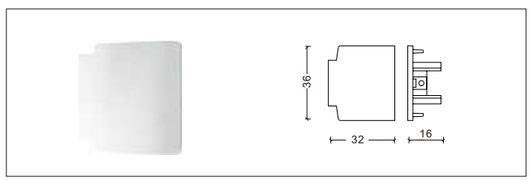

NO: YND-6-fitting

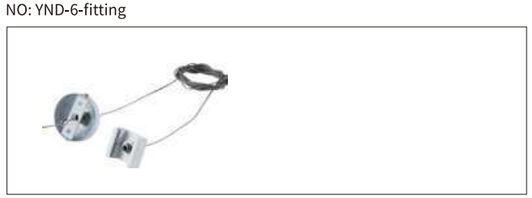




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm







Product introduction

6-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

Installation diagram

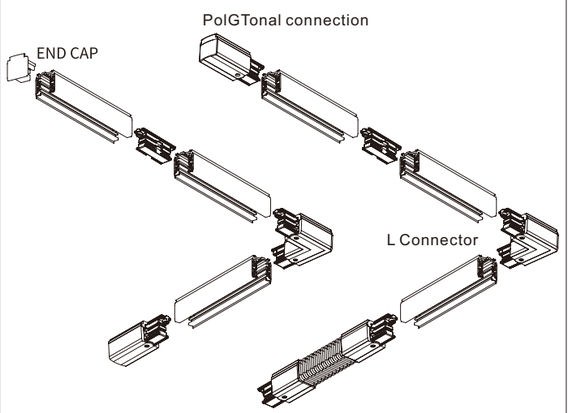

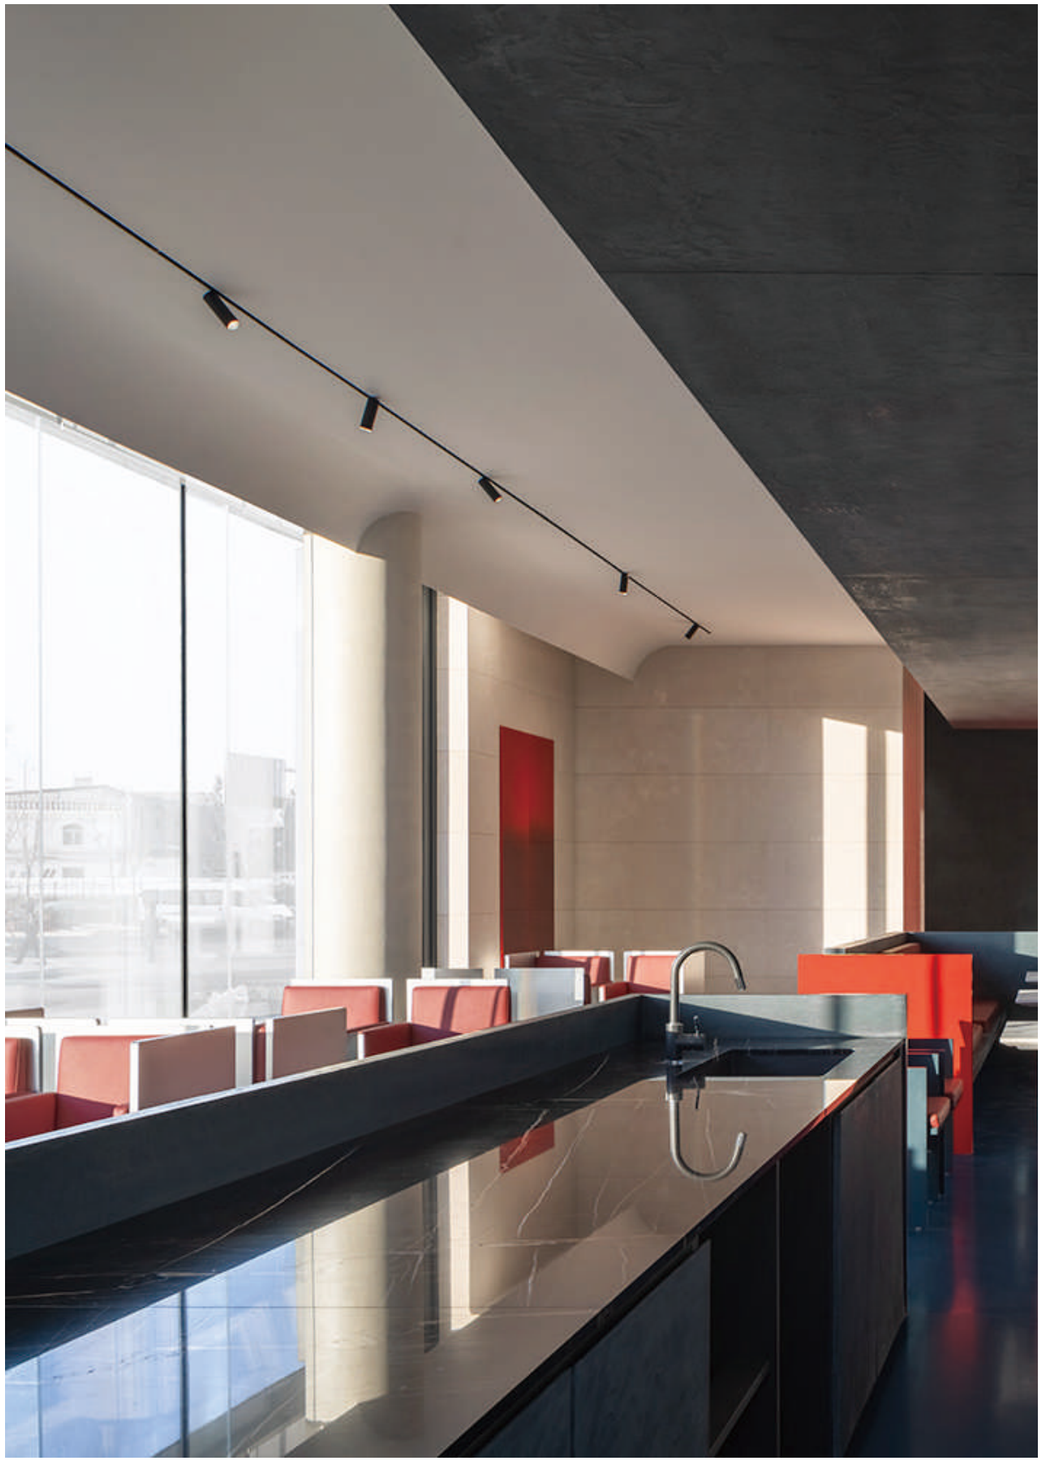

YND-4601A-Y




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm





YND-4602A-Y




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm





YND-4603A-Y




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm






YND-4601A-F

COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm








YND-4602A-F

COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm








YND-4603A-F

COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm









Track Connectors

YND-04-Feeder-L

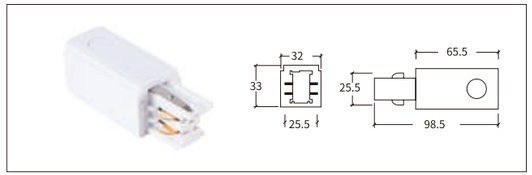


YND-04 Straight Connector MINI


YND-04-Feeder-R

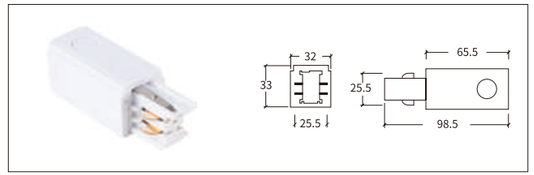


YND-04 Straight Connector

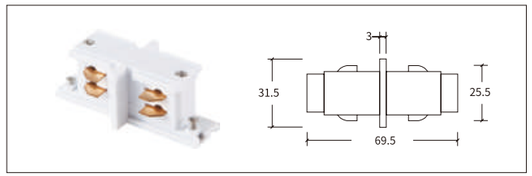


YND-04 L-Connector-L

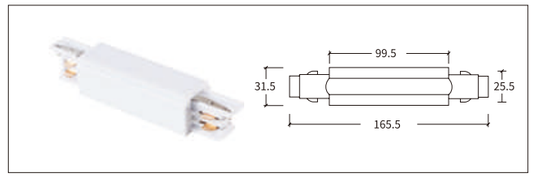


YND-04 R-Connector-R

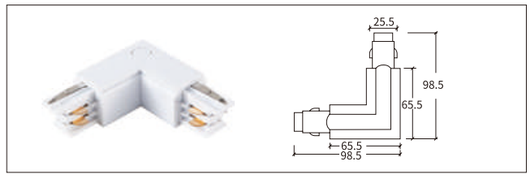


YND-04 T-Connector-L

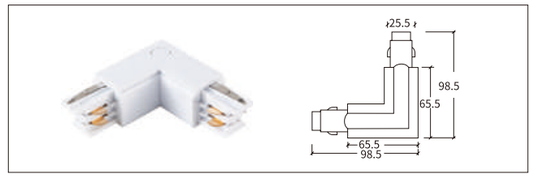


YND-04 T-Connector-R

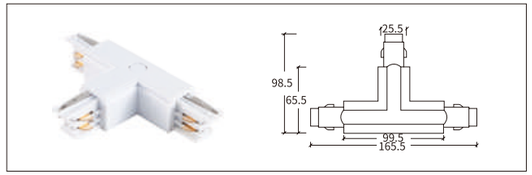


YND-04 X-Connector

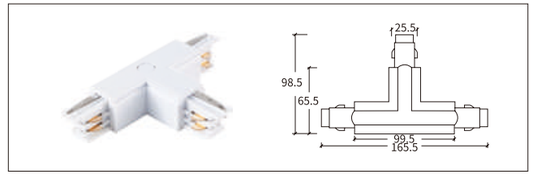


YND-04 End Cap

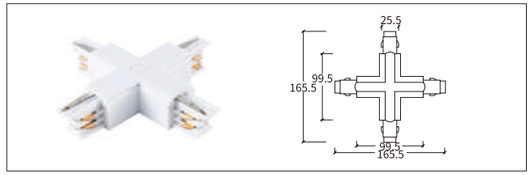



YND-04 Flexible Connector

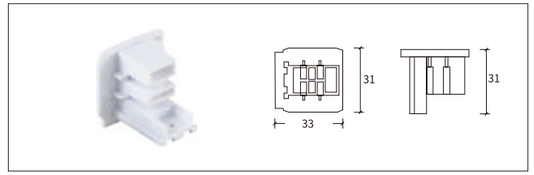

YND-04 Flexible Connector

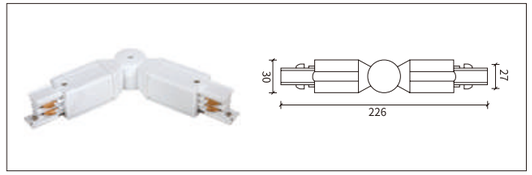

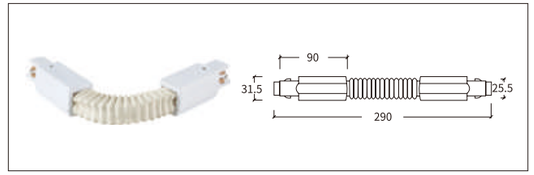

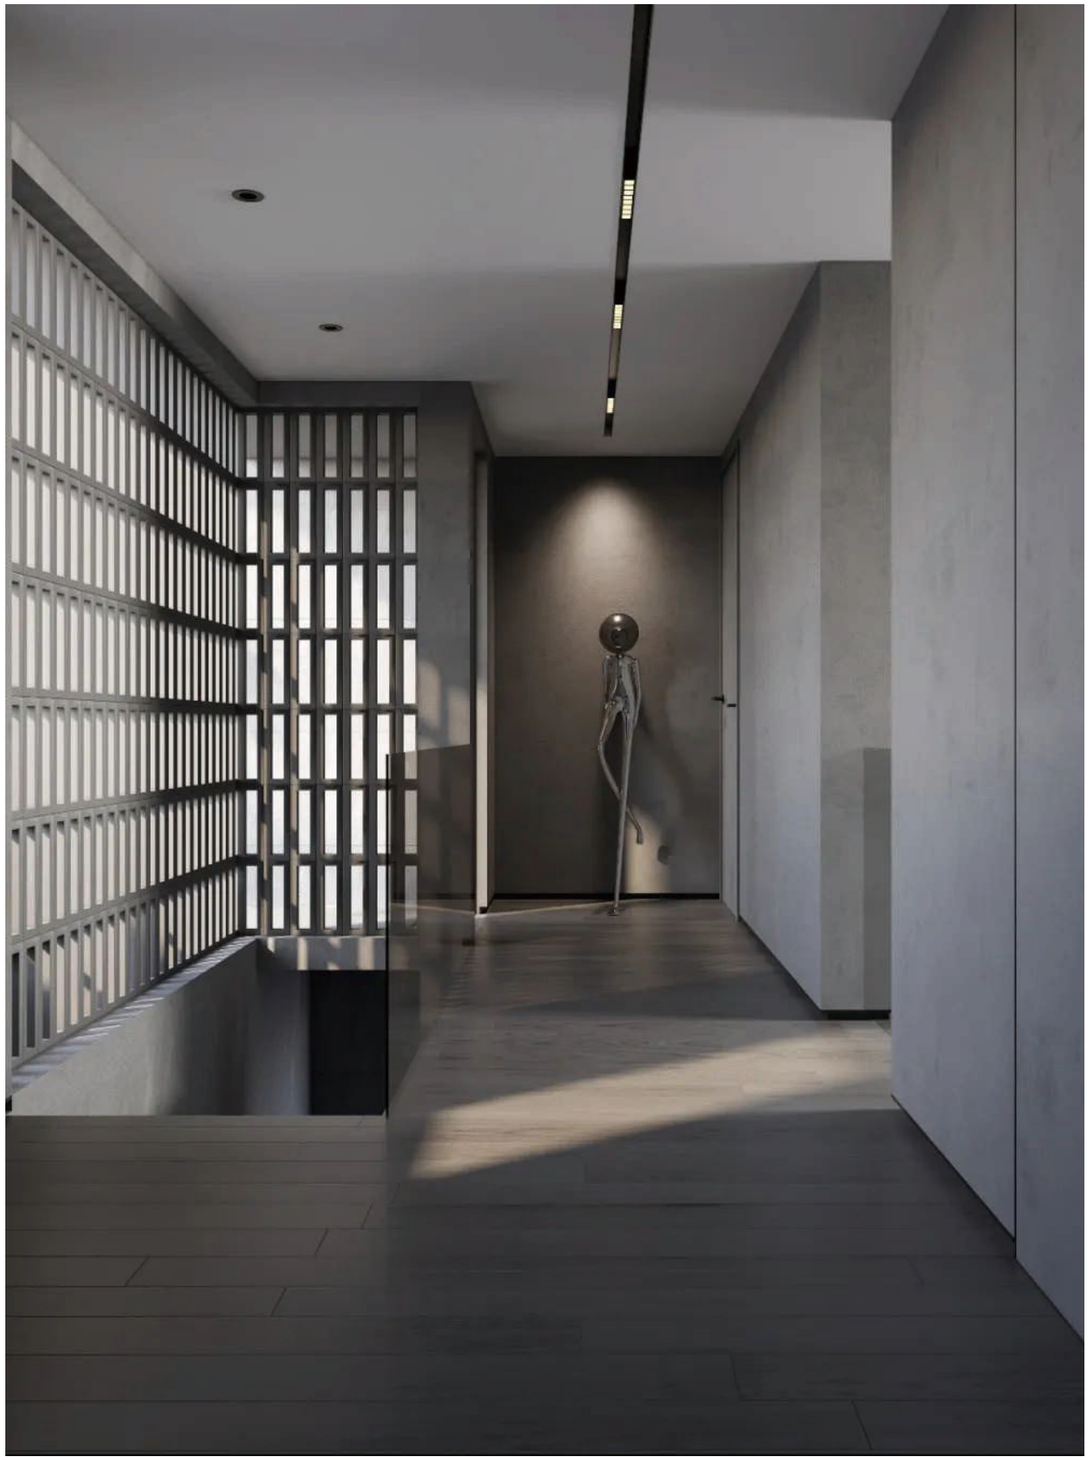




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




F I IP20 10

Product introduction


4-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

Installation diagram

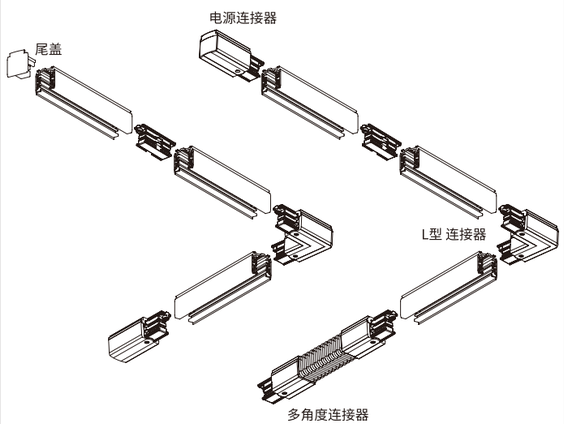


Track Connectors


H-01 Feeder-L

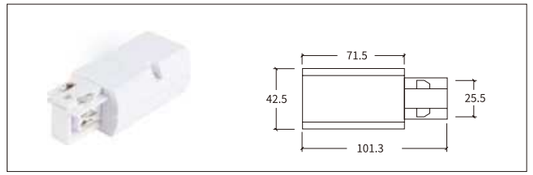


H-01 Feeder-R

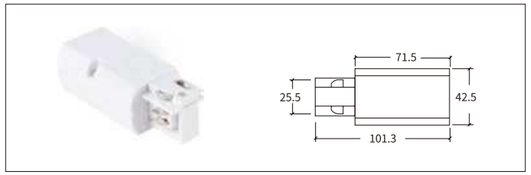


H-01 Straight Connector MINI

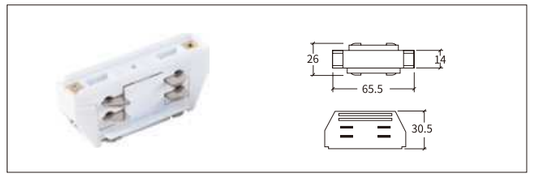


H-01 Straight Connector

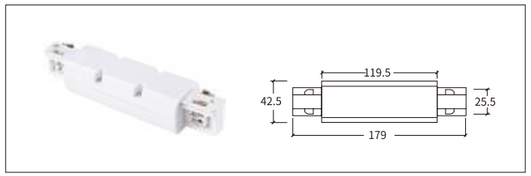


H-01 L-Connector-L

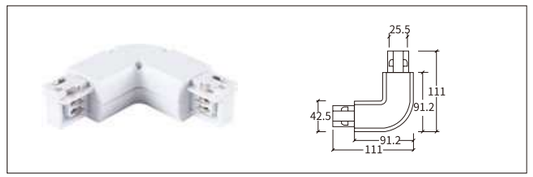


H-01 L-Connector-R

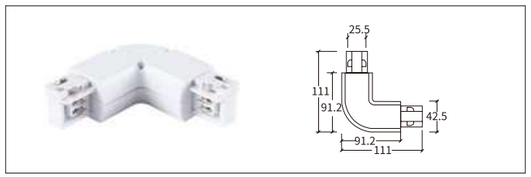


H-01 T-Connector-L

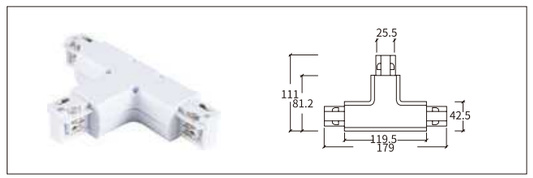


H-01 T-Connector-R

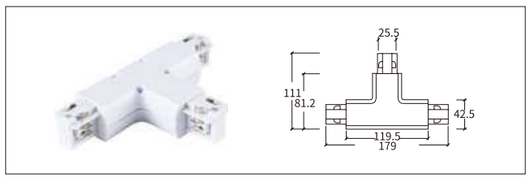


H-01 X-Connector

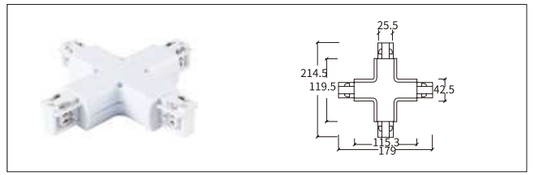

H-01 End Cap

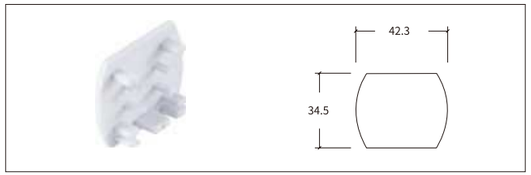

H-01 Flexible Connector

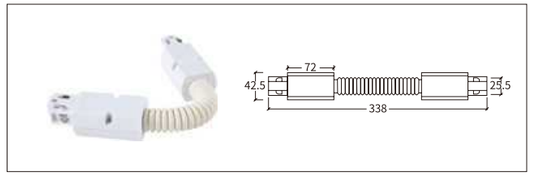

H-01 Fitting






COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




F | I | IP20 | 8

Product introduction


4-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

Installation diagram

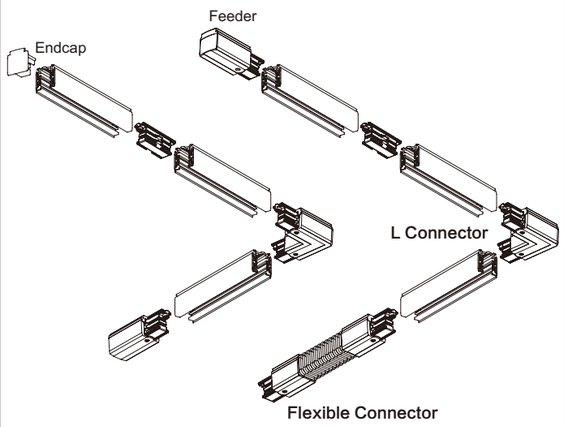


Track Connectors


YND-05 Feeder-L

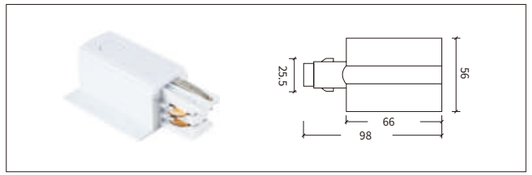


YND-05 Feeder-R

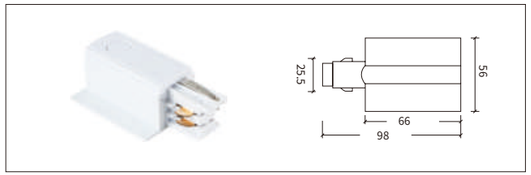


YND-05 Straight Connector

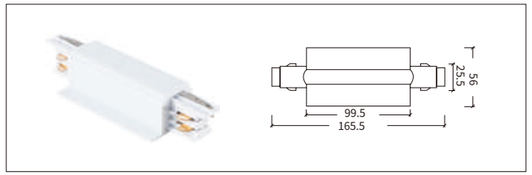


YND-05 X-Connector

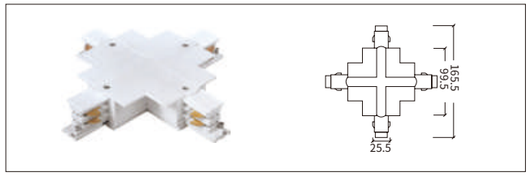

YND-05 L-Connector-L

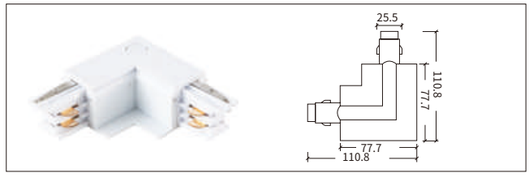

YND-05 L-Connector-R

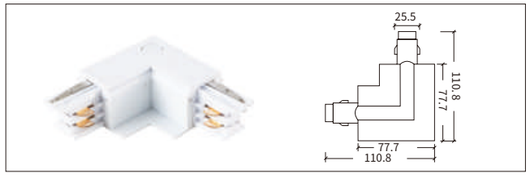


YND-05 T-Connector-L




YND-05 T-Connector-R




YND-05 Flexible Connector

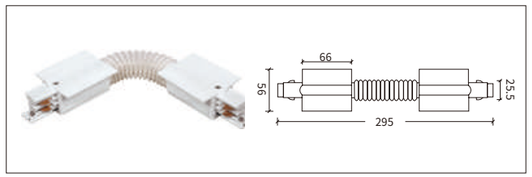


YND-05 End Cap

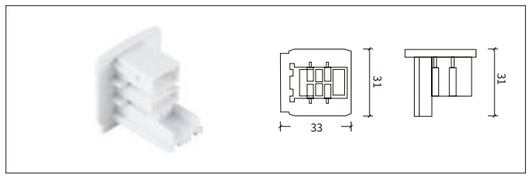

H-04 Fitting

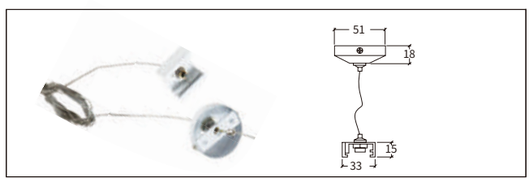

H-04 Fitting

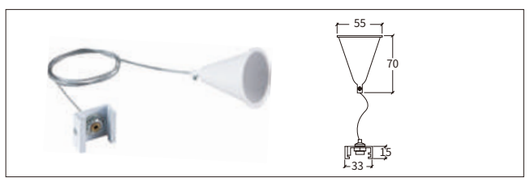

YND-304A




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10

YND-305A




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10

YND-306A




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10


YND-308A

COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10




YND-310A

COLOUR:

WH BK SL

LENGTH:


1000mm/1500mm/2000mm/3000mm



F I IP20 10




Installation diagram

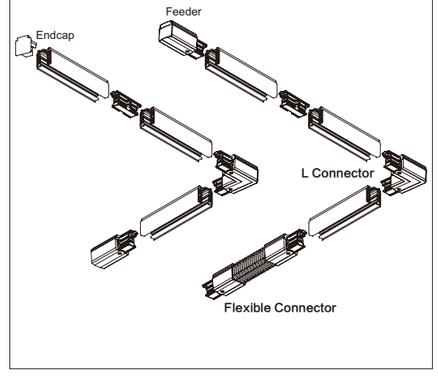


Track Connectors


3 Wires feed in

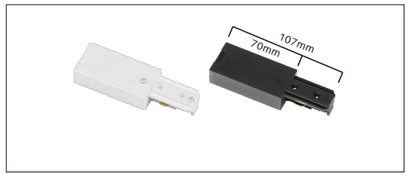


3 Wires mini straight connector

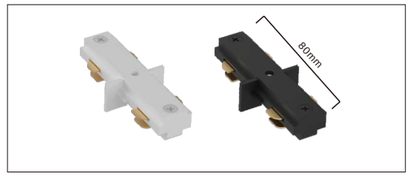


3 Wires straight connector

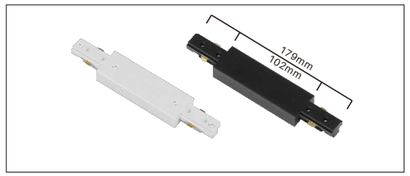


3 Wires L connector

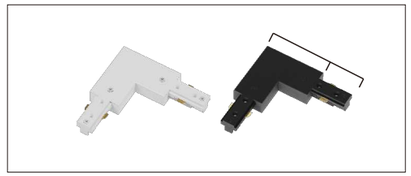


3 Wires T connector

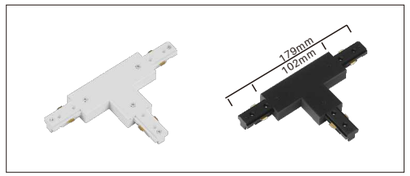


3 Wires ┼ connector

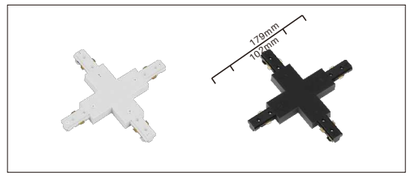


3 Wires flexible connector

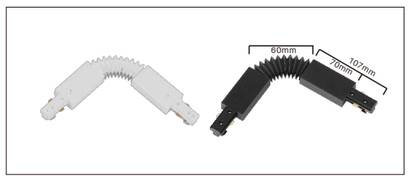


3 Wires transfer connector

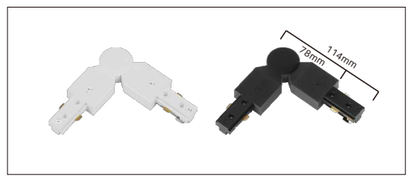

3 Wires End Cap

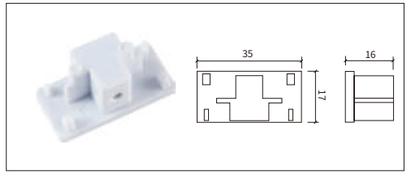

Three Line ASA Track

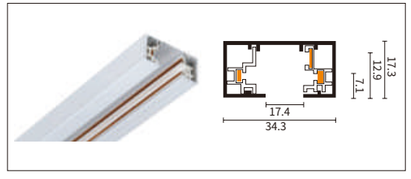








COLOUR:

WH BK SL


LENGTH:

1000mm/1500mm/2000mm/3000mm





Installation diagram

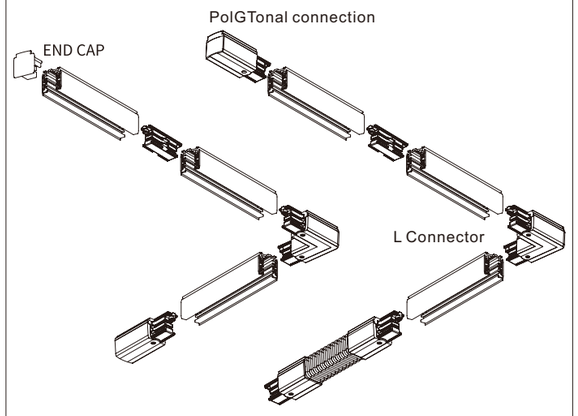


Product introduction


6-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

Track Connectors


Feeder-L

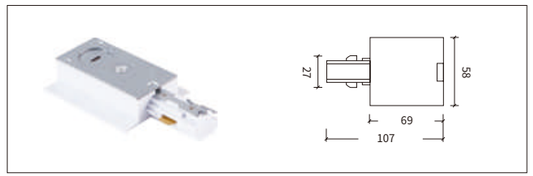


Feeder-R

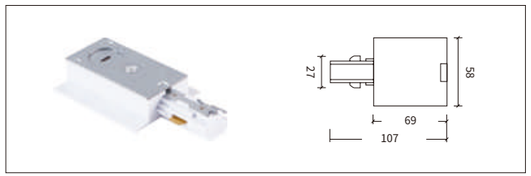


Straight Connector

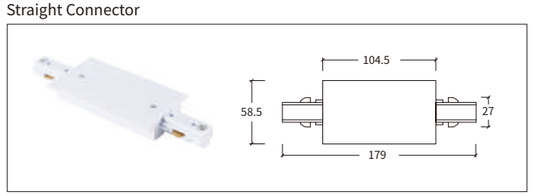


X-Connector

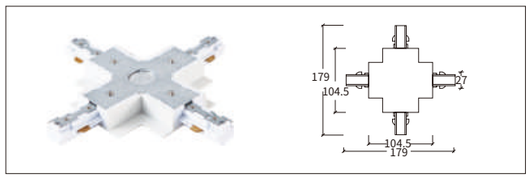


L-Connector-L

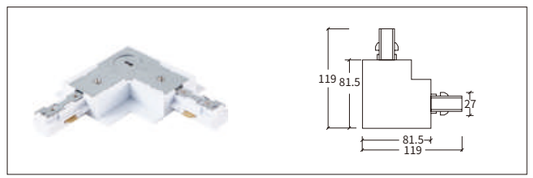


L-Connector-R

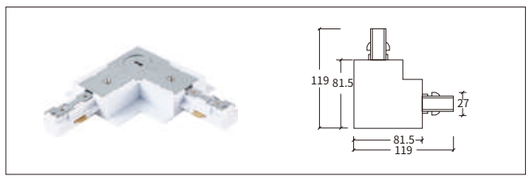


T-Connector-L

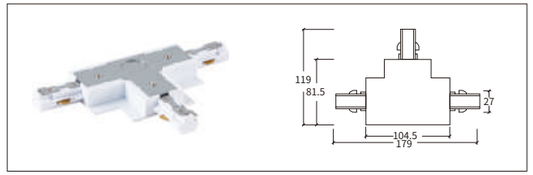


T-Connector-R

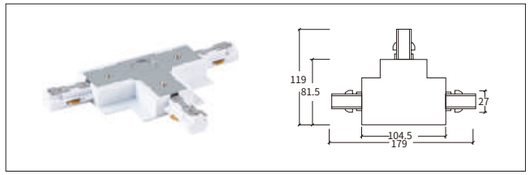


Flexible Connector

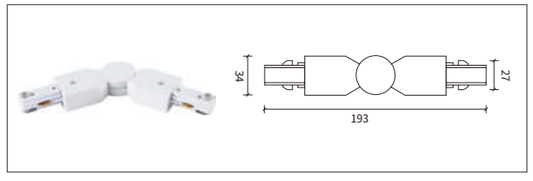


End Cap

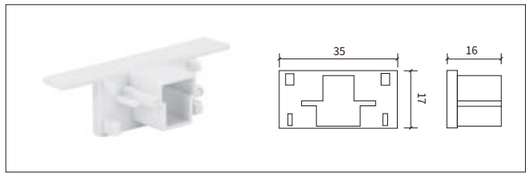

Connector

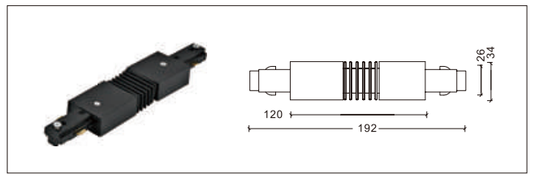

Fitting

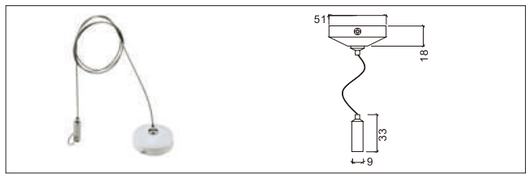

YND–203




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10

YND–204




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10

YND–205




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10


YND–206

COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10




YND–208

COLOUR:

WH BK SL

LENGTH:


1000mm/1500mm/2000mm/3000mm



F I IP20 10



Installation diagram

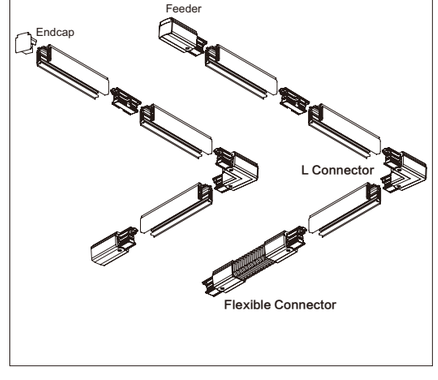

YND-J302




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10

YND-202




COLOUR:

WH BK SL


LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10

Installation diagram

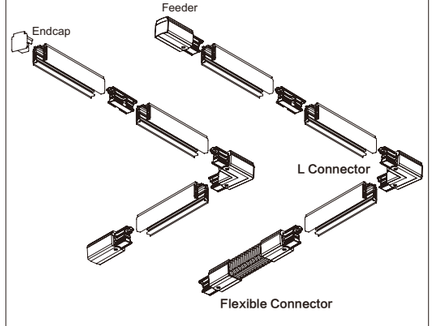


YND-YSL201

COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm



F I IP20 10




YND-YSL202

COLOUR:

WH BK SL

LENGTH:


1000mm/1500mm/2000mm/3000mm



F I IP20 10




Installation diagram

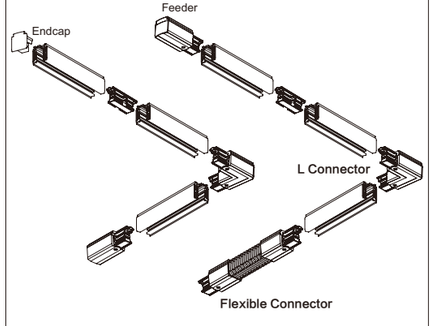


Track Connectors

2 Wires regular connectors (Pure cooper)


2 Wires straight connector

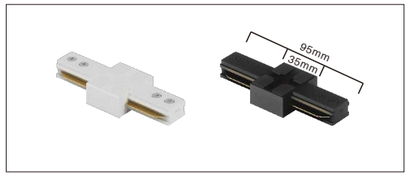


2 Wires L connector

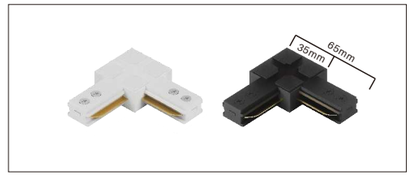

2 Wires T connector

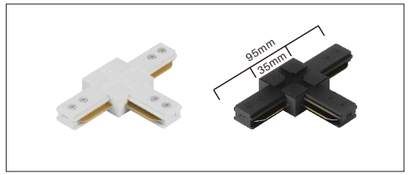


2 Wires ┼ connector

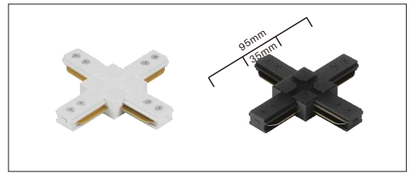


2 Wires luxury connectors (Pure cooper)


2 Wires Feed in

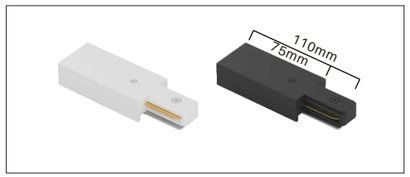


2 Wires luxury mini straight connector

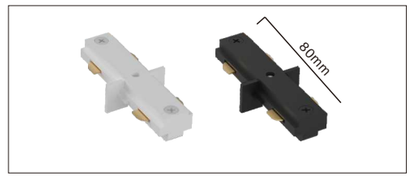


2 Wires luxury I straight connector

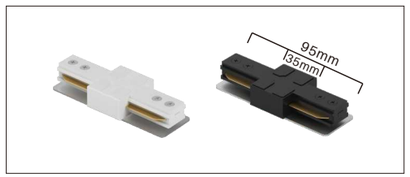


2 Wires luxury L connector

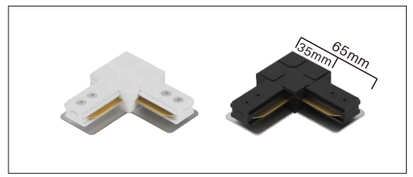


2 Wires luxury T connector

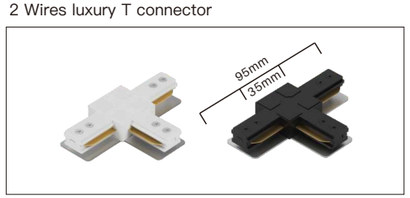


2 Wires luxury ┼ connector

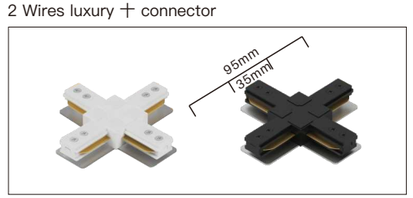

2 Wires Flexible Connector

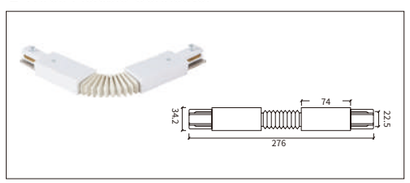

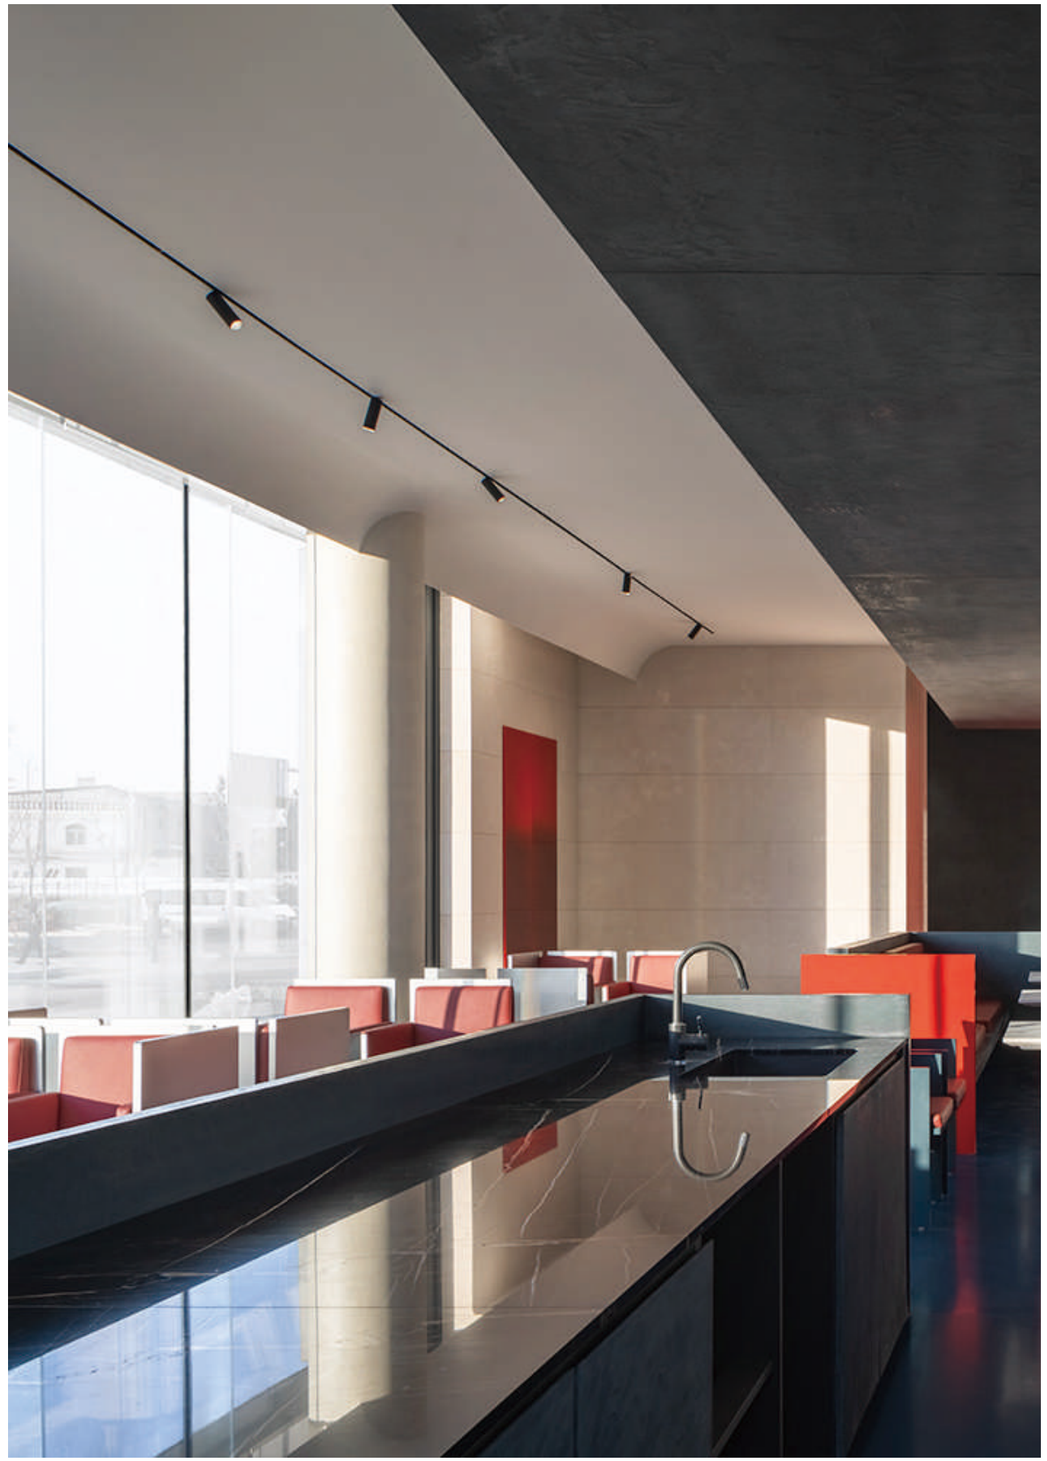




COLOUR:

WH BK SL

LENGTH:

1000mm/1500mm/2000mm/3000mm




F I IP20 12

Product introduction


2-circuit main voltage track in extruded aluminium Main voltage 220-240V.Electrical wiring is located in an extruede PVC insulated housing The track is supplied with a series of accessories which will successfully resolve almost all types of lighting imstallation requirements And also has the facility for direct surface mounting through knockouts at 500m spacing.

Installation diagram

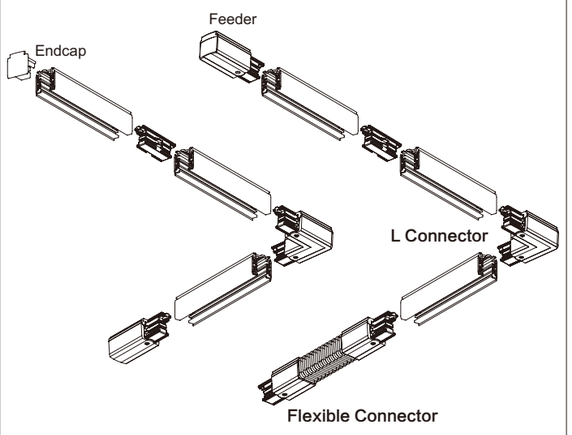


Track Connectors


YND-2R Feeder

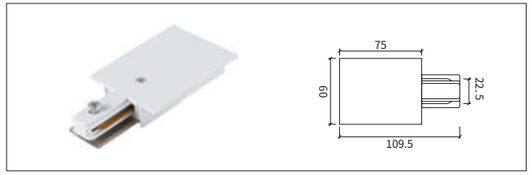


YND-2R End Cap

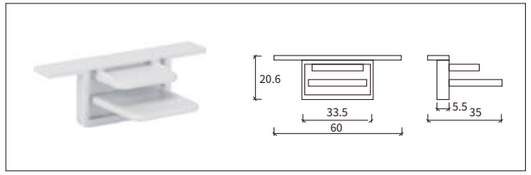


YND-2R Straight Connector

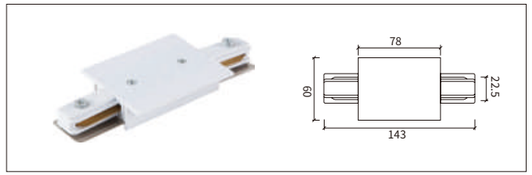


YND-2R L-Connector

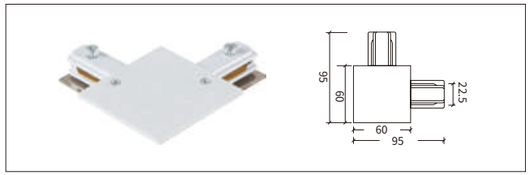

YND-2R T-Connector

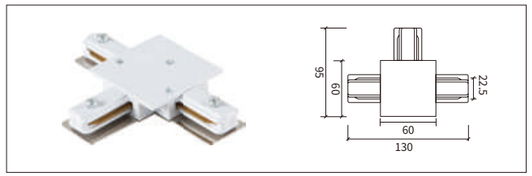


YND-2R X-Connector

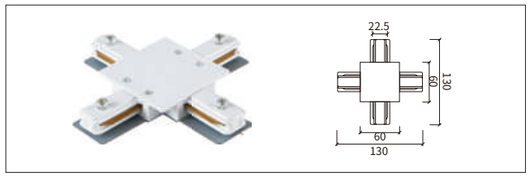

YND-2R Straight Connector MINI



YND-2R Flexible Connector

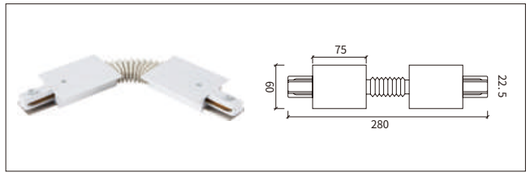

YND-2R Fitting



2–wire cable tray series

2–wire cable tray 35602



2–wire cable tray 35502



2–wire cable tray 60352




2–wire cable tray 60402




2 Wires cable tray connectors (Pure cooper)


2 Wires cable tray feed in

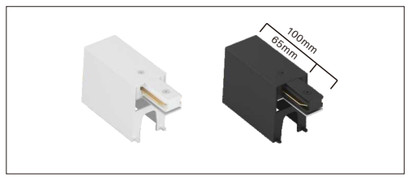


2 Wires cable tray straight connector

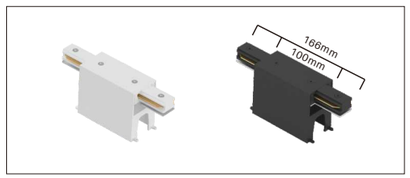


2 Wires cable tray L connector

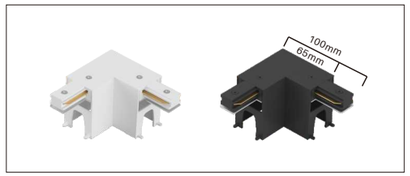

2 Wires cable tray T connector

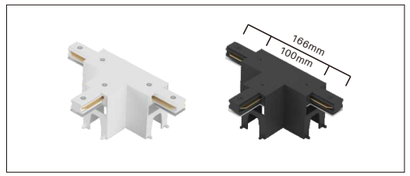


2 Wires cable tray ＋ connector

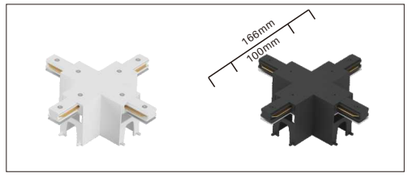

3–wire cable tray series


3–wire cable tray 35603

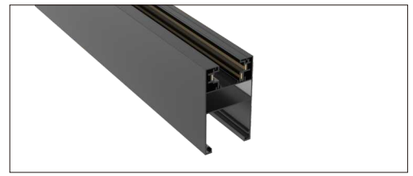


3–wire cable tray 35503



3–wire cable tray 60353

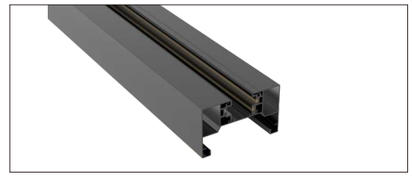


2–wire cable tray 60403

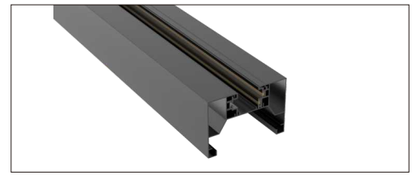


3 Wires cable tray connectors (Pure cooper)


3 Wires cable tray feed in

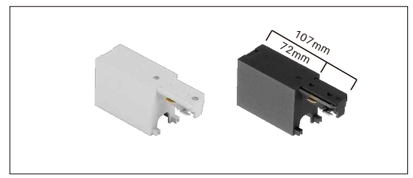


3 Wires cable tray straight connector

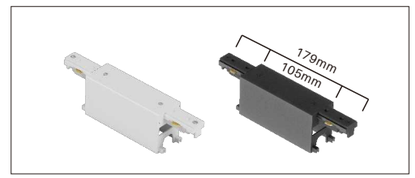


3 Wires cable tray L connector

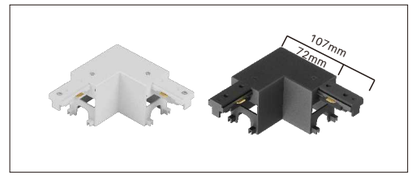

3 Wires cable tray T connector


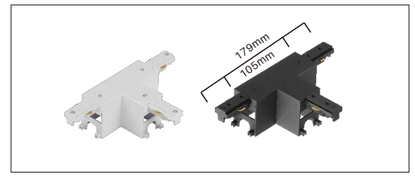


3 Wires cable tray ＋ connector

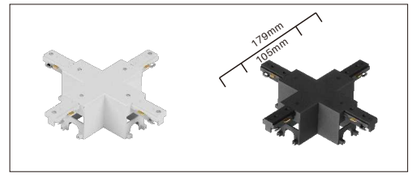


Hollow magnetic track, light ceiling load-bearing, good safety, no deformation.

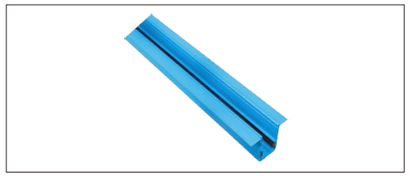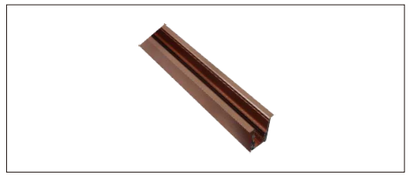



High-voltage track system






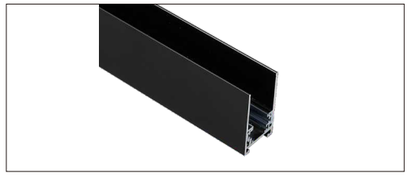

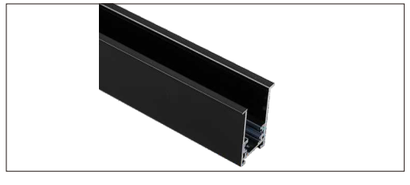TECHNOLOGY OF AC TRACK RAIL

Multiple track rails for you to choose from

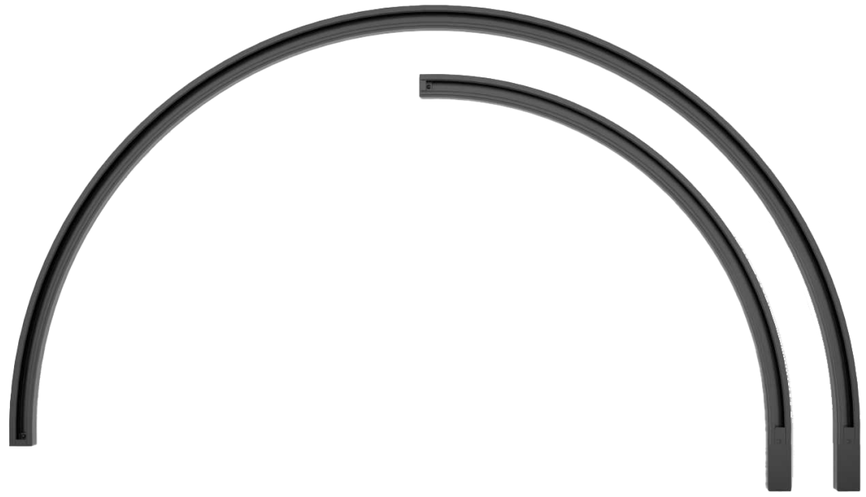

Professional production of 2 Wires/ 3 Wires/ 4 Wires/ rail bridge / magnetic track rail etc.

Various curved and non-standard shapes track rails all can be customized